


VERSITRIM CF GOLD COPING

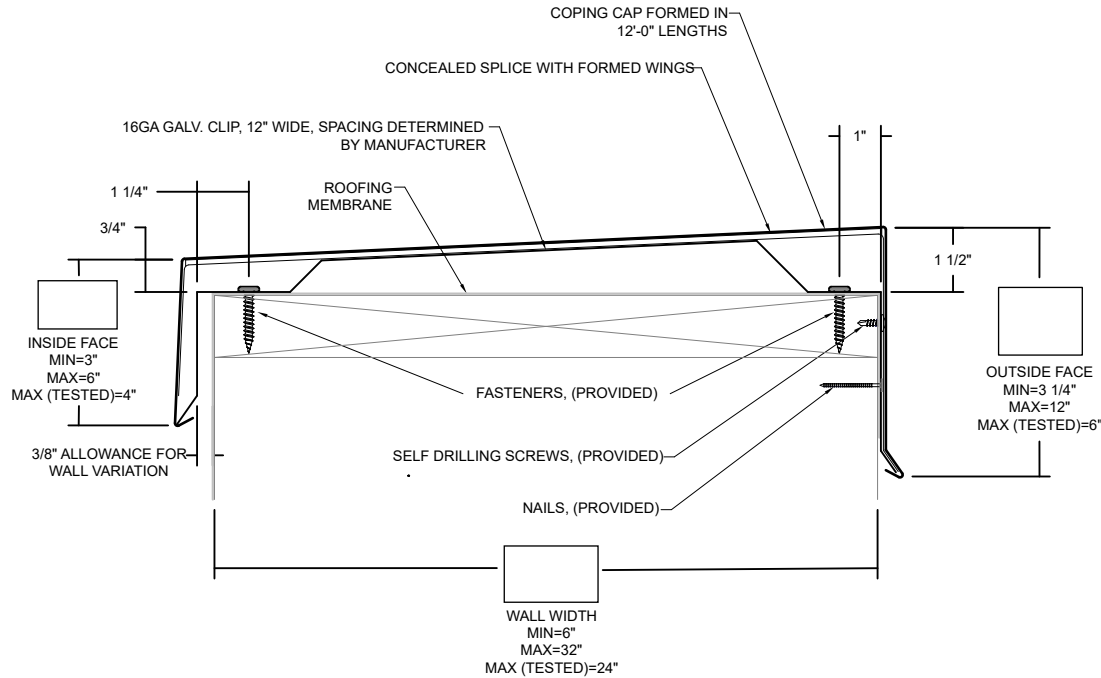

* NOTES

- Oil canning can occur on larger face heights; recommend 22 ga., .050" or .063" for face height over 8"

- Unless otherwise noted, fabrication of miters and accessories are furnished standard utilizing a non-penetrating quicklock joint, then factory sealed watertight.

- Welded accessories require a minimum material thickness of .050"

- For non-90 miters, see separate print approval

- Product should be installed per provided installation instructions

- ANSI/SPRI/FM 4435/ES-1 test pressures up to 65 psf (Horizontal) and 111 psf (Vertical) for .063" aluminum cap on 24" wall

- Contact us for masonry applications

PROJECT INFO

Project Name: _____

Architect: _____

Roofing Contractor: _____

Project Type:

By selecting this box you have verified and confirmed that dimensions, sizes, and quantities are correct. All products will be installed in strict accordance with printed instructions.

Date: _____

Customer Service
800-558-2162
(Metal-Era)

SHT #: _____ of _____

DATE: **09/19/24**

DRN BY: **PL**

CKD BY: **KP**

DWG #: **18011-37086**

REV: **B**

APPROVALS*

ANSI/SPRI/FM 4435/ES-1
Test Pressures listed in notes

MATERIAL*

- 24 Ga. Galv. Steel
- 22 Ga. Galv. Steel
- .040" Aluminum
- .050" Aluminum
- .063" Aluminum
- OTHER: _____

Color: _____

Finish: _____

Substrate:

if substrate is not given, wood fasteners will be provided.

- Wood
- Masonry
- Metal

QUANTITIES

Accessory Type* : Quicklock (Default) Welded (Surcharge)

_____ Straight Lineal Feet (12'-0" Lengths)

_____ Total Miters (90°) (Inside: ___ | Outside: ___)

_____ Total Endcaps (Left: ___ | Right: ___)

_____ Total Endwall Flashing (Left: ___ | Right: ___)

_____ Transition Miters

_____ T-Miters

_____ Z-Miters

_____ Radius Lineal Feet (Welded) (4'- 0" Lengths)

_____ Radius to Straight Miters (Welded)

_____ Radius End Caps

_____ Vault Lineal Feet (Welded) (4'- 0" Lengths)

_____ Vault to Straight Miters (Welded)

_____ Vault End Caps

_____ Ridge Miters


_____ Valley Miters

VERSITRIM CF GOLD COPING

STANDARD ACCESSORIES

NOTES

For special miter and accessory requirements, contact manufacturer for assistance.

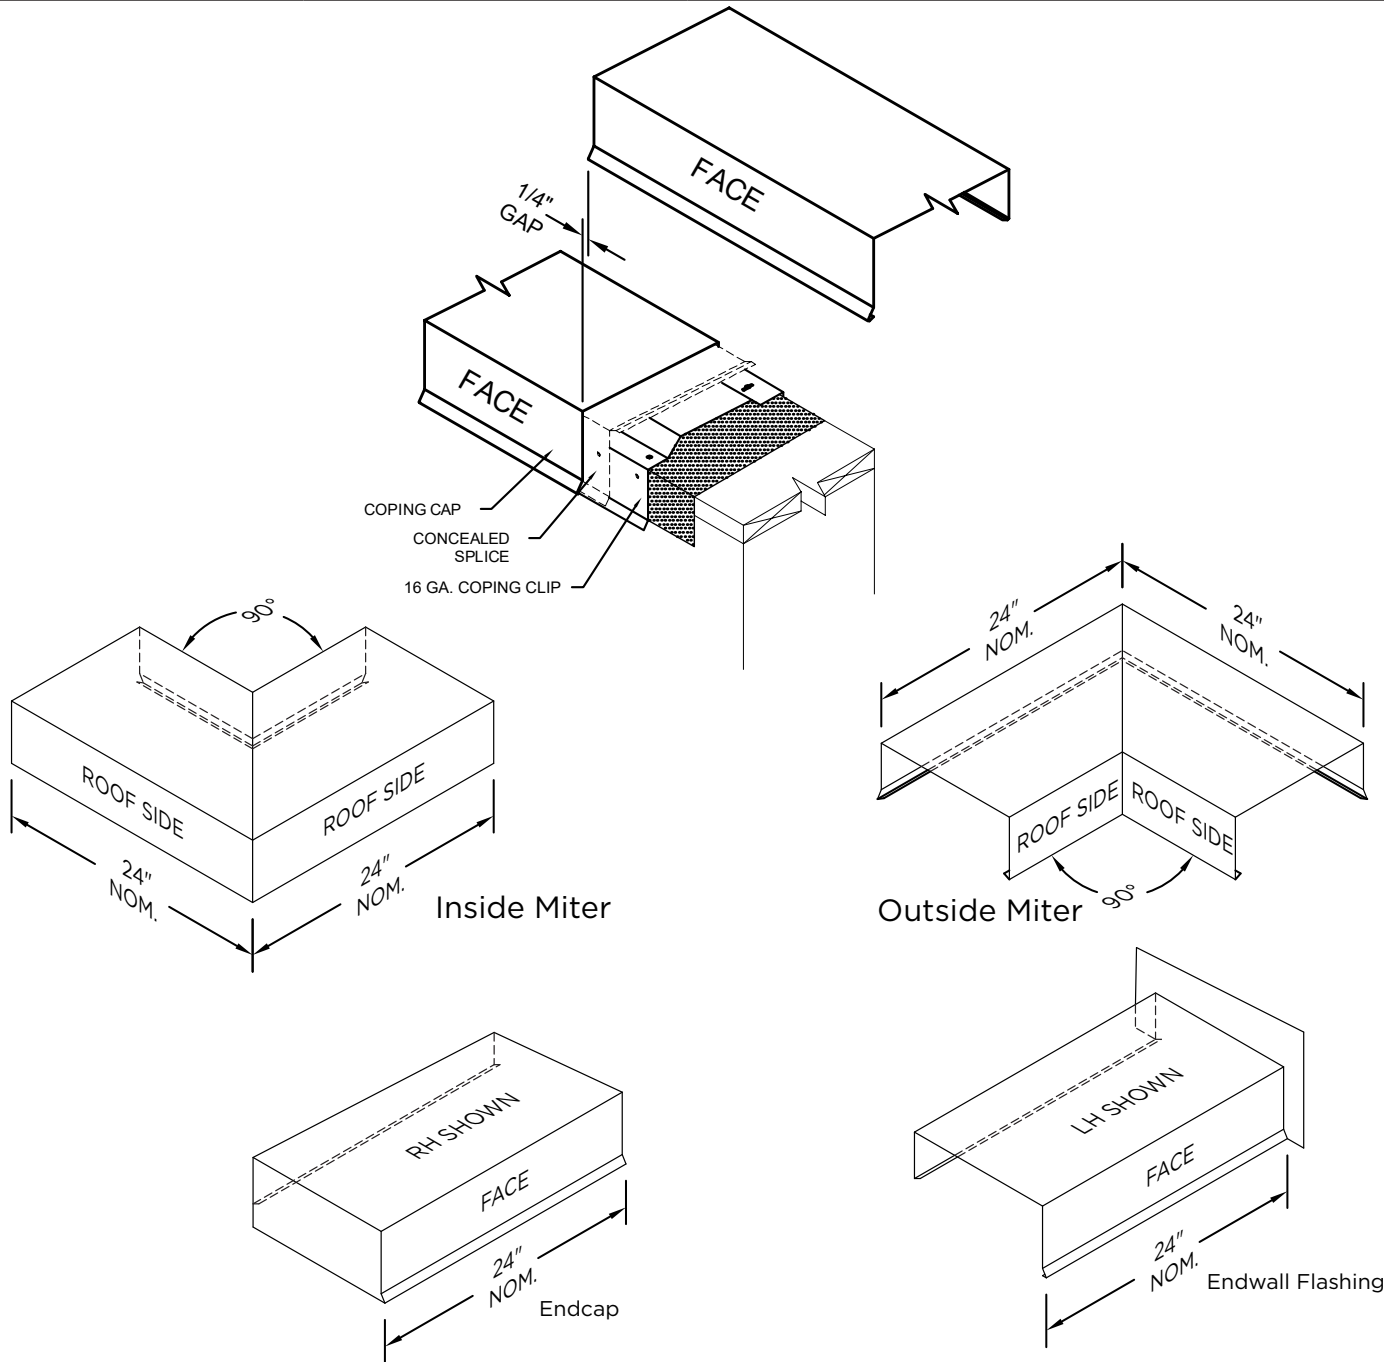

SHT #:	_____ of _____
DATE:	09/19/24
DRN BY:	PL
CKD BY:	KP
DWG #:	18011-37086
REV:	B

Customer Service
800-558-2162
(Metal-Era)