




ELEVATE SNAP-ON PLUS COPING

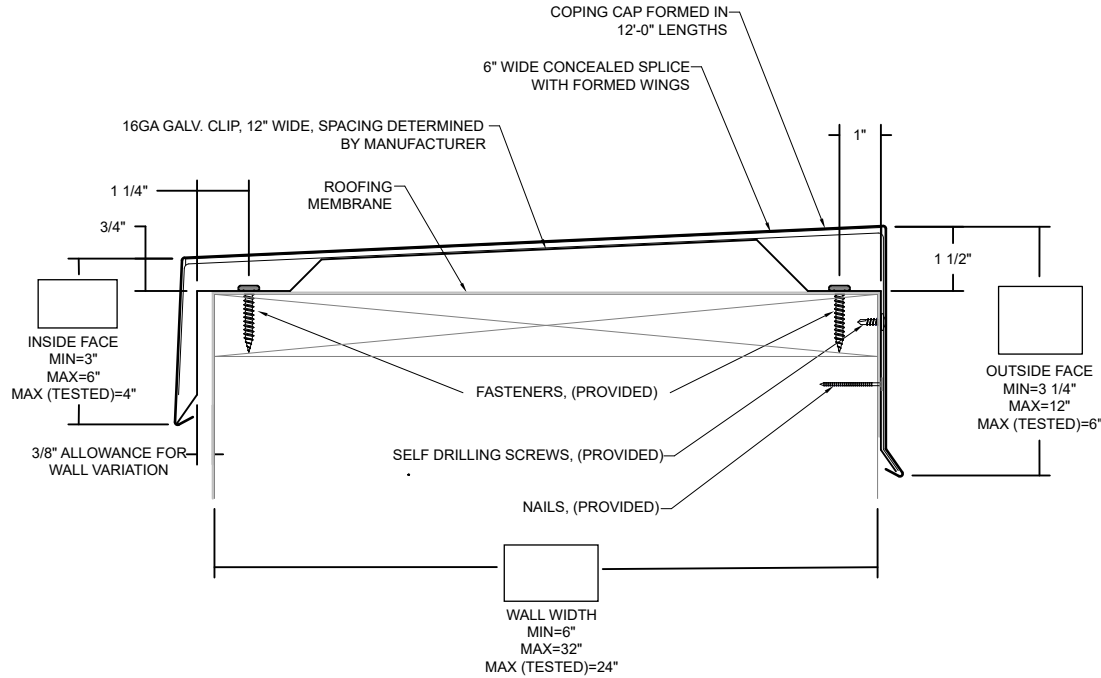

* NOTES

- Oil canning can occur on larger face heights; recommend 22 ga., .050" or .063" for face height over 8"

- Unless otherwise noted, fabrication of miters and accessories are furnished standard utilizing a non-penetrating quicklock joint, then factory sealed watertight.

- Welded accessories require a minimum material thickness of .050"

- For non-90 miters, see separate print approval

- Product should be installed per provided installation instructions

- ANSI/SPRI/FM 4435/ES-1 test pressures up to 65 psf (Horizontal) and 111 psf (Vertical) for .063" aluminum cap on 24" wall

- Contact us for masonry applications

PROJECT INFO

Project Name: _____

Architect: _____

Roofing Contractor: _____

Project Type:

By selecting this box you have verified and confirmed that dimensions, sizes, and quantities are correct. All products will be installed in strict accordance with printed instructions.

Date: _____

Elevate
26 Century Blvd.
Suite 205
Nashville, TN 37214
Contact your local
Elevate representative.

SHT# 1 of 2

DATE: 03/20/23

DRN BY: PL

CKD BY: KP

DWG #: 13011-37083

REV: B

APPROVALS*

ANSI/SPRI/FM 4435/ES-1
Test Pressures listed in notes

MATERIAL*

- 24 Ga. Galv. Steel
- 22 Ga. Galv. Steel
- .040" Aluminum
- .050" Aluminum
- .063" Aluminum
- OTHER: _____

Color: _____

Finish: _____

Substrate:

if substrate is not given, wood fasteners will be provided.

- Wood
- Masonry
- Metal

QUANTITIES

Accessory Type* : Quicklock (Default) Welded (Surcharge)

_____ Straight Lineal Feet (12'-0" Lengths)

_____ Total Miters (90°) (Inside: ___ | Outside: ___)

_____ Total Endcaps (Left: ___ | Right: ___)

_____ Total Endwall Flashing (Left: ___ | Right: ___)

_____ Transition Miters

_____ T-Miters

_____ Z-Miters

_____ Radius Lineal Feet (Welded) (4'- 0" Lengths)

_____ Radius to Straight Miters (Welded)

_____ Radius End Caps

_____ Vault Lineal Feet (Welded) (4'- 0" Lengths)

_____ Vault to Straight Miters (Welded)

_____ Vault End Caps

_____ Ridge Miters

_____ Valley Miters




ELEVATE SNAP-ON PLUS COPING

STANDARD ACCESSORIES

NOTES

For special miter and accessory requirements, contact manufacturer for assistance.

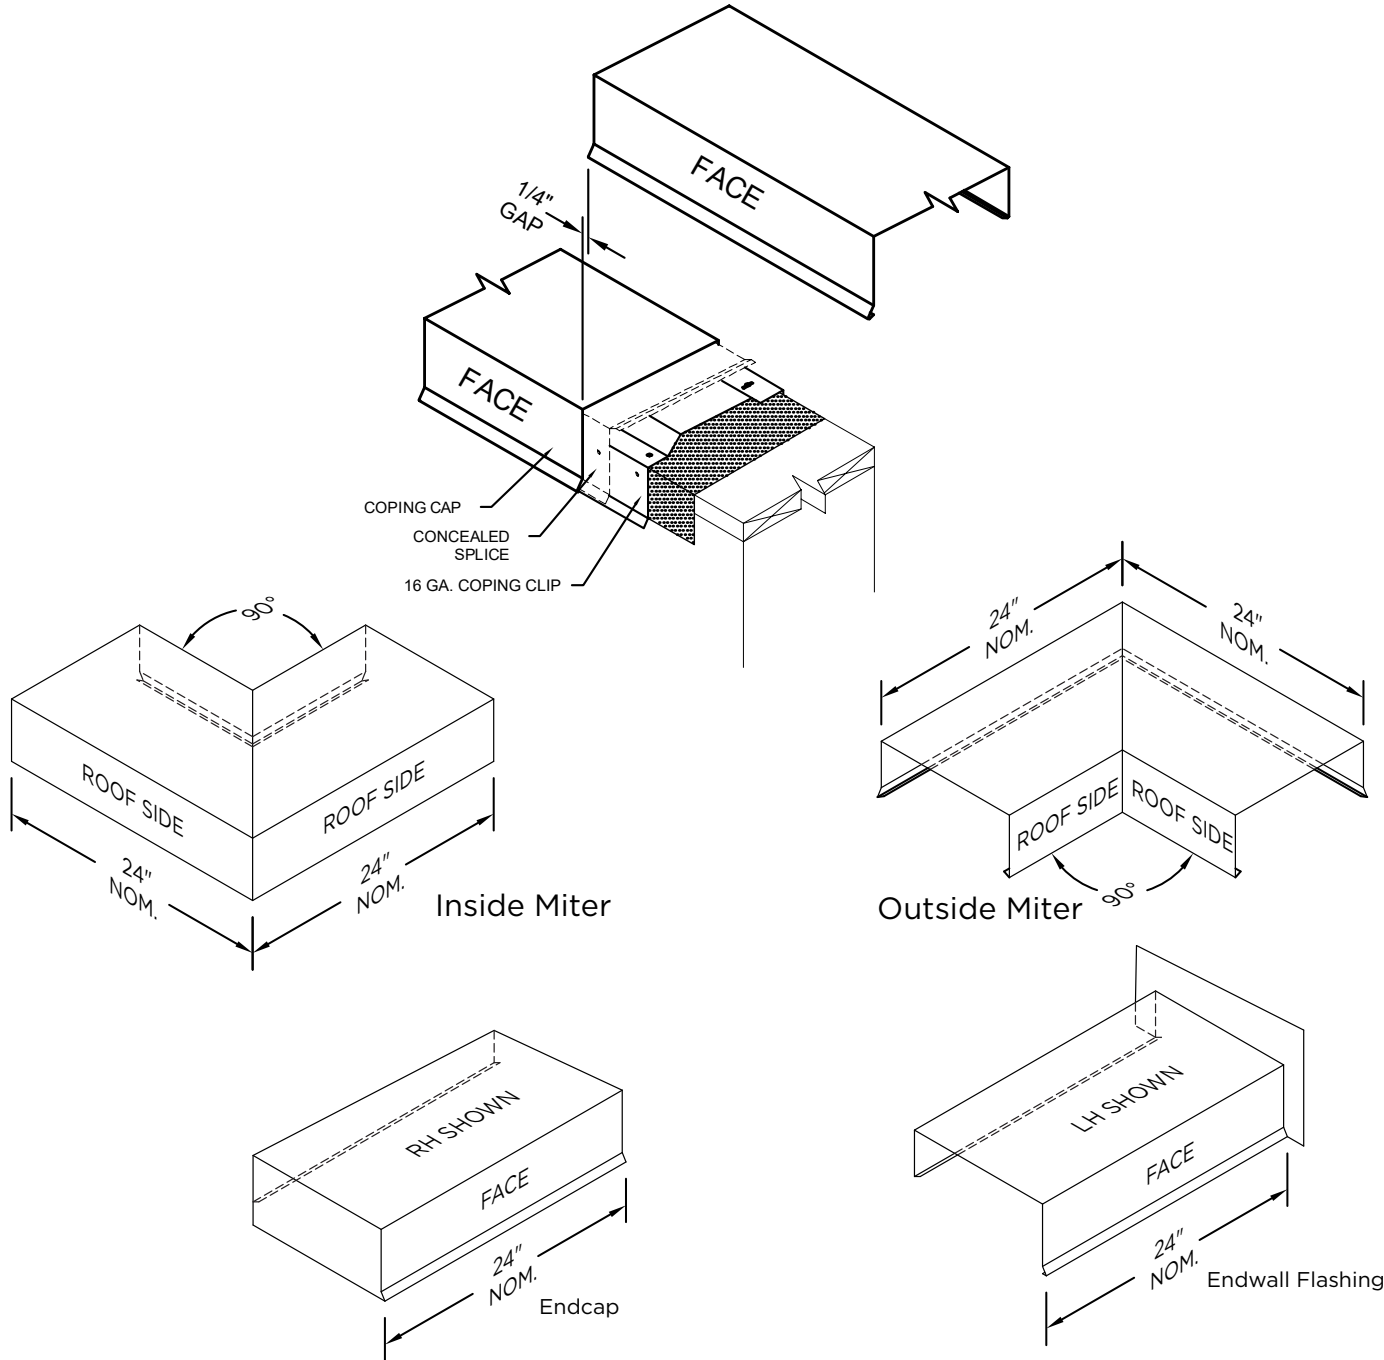

SHT# 2 of 2

DATE: 03/20/23

DRN BY: PL

CKD BY: KP

DWG #: 13011-37083

REV: B

Elevate
26 Century Blvd.
Suite 205
Nashville, TN 37214
Contact your local
Elevate representative.