PERMASNAP CANTILEVER QUICKLOCKED RADIUS COPING

FLAT VERSION WITH SADDLE

IMPORTANT!!! MUST INDICATE PROPER RADIUS CONDITION BY CIRCLING APPROPRIATE OUTSIDE FACE

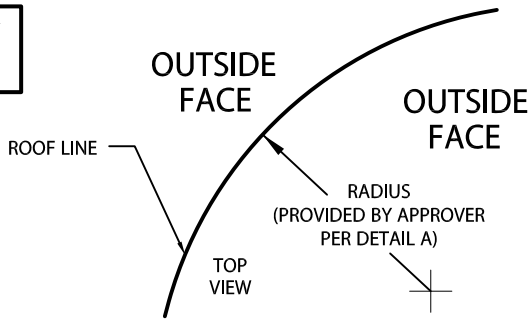

PROVIDING A RADIUS
THE RADIUS MAY BE PROVIDED IN ONE OF TWO METHODS:

1.) THE ACTUAL KNOWN RADIUS IS

_____' FEET _____" INCHES MINIMUM OF 3'-0"

OR

2.) FIELD CONDITION MEASUREMENTS

NOTE: REFER TO ATTACHED WORKSHEET FOR FURTHER INFORMATION

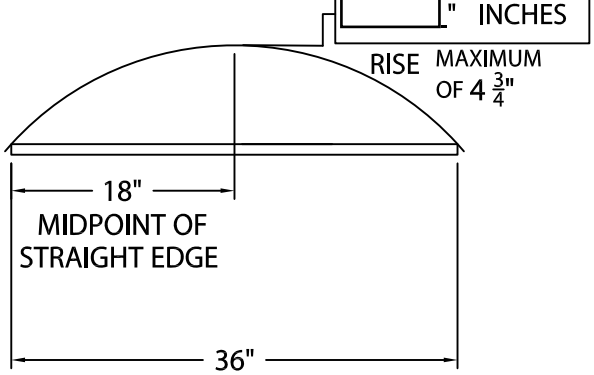

NOTE: CHECK MEASUREMENTS ALONG ENTIRE RADIUS.

DETAIL A

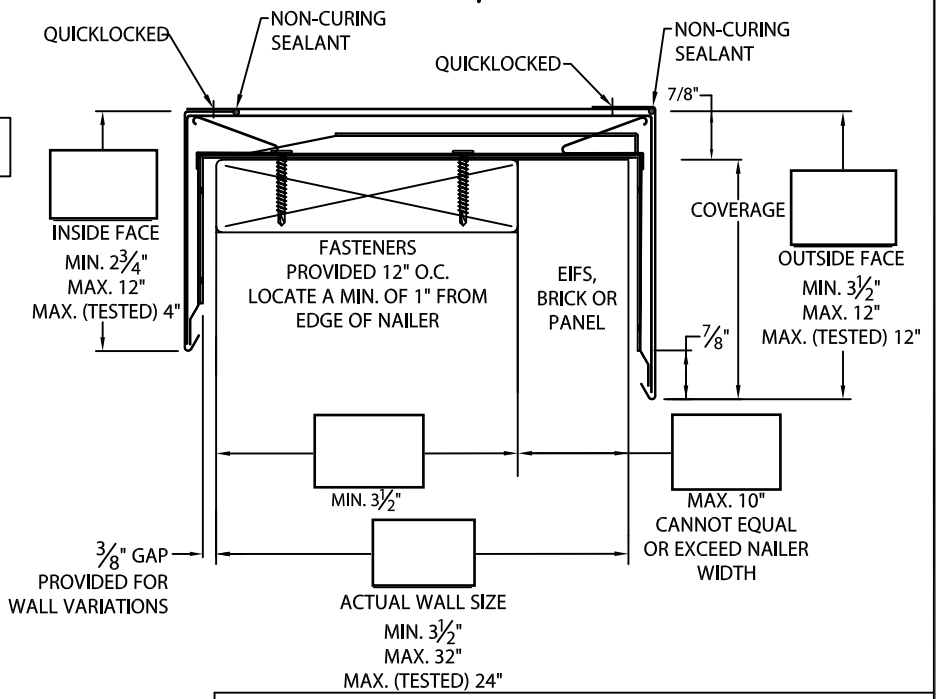

PLEASE SPECIFY SUBSTRATE:
(IF SUBSTRATE INFORMATION IS NOT GIVEN, WOOD SUBSTRATE FASTENERS WILL BE PROVIDED)

- ☐ WOOD
- ☐ MASONRY
- ☐ METAL

Fabrication will proceed only after receipt of signed print approval.

Print Approval:

Architect and/or contractor shall verify all dimensions, sizes and quantities. All products to be installed in strict accordance with printed instructions.

Approved by: _____

Date: _____

NOTES: -- CONCEALED SPLICE PLATES ARE PROVIDED WITH FACTORY APPLIED DUAL NON-CURING SEALANT STRIPS.
– FABRICATION OF RADIUS IS FURNISHED UTILIZING A NON-PENETRATING QUICKLOCKED JOINT, THEN FACTORY SEALED WATERTIGHT.

MATERIALS:

- ☐ 24 GA. STEEL
- ☐ .050" ALUMINUM
- ☐ .040" ALUMINUM
- ☐ .063" ALUMINUM
- ☐ OTHER _____ COLOR: _____
- FINISH: _____

QUANTITIES:

_____ LINEAL FEET 4'-0" LENGTHS

PROJECT: _____

ARCHITECT: _____

ROOFING CONTRACTOR: _____

REPRESENTATIVE/DISTRIBUTOR: _____

Hickman Edge Systems
4 Commerce Way
Arden, NC 28704
Phone: 828-676-1700
www.hickmanedgesystems.com

HICKMAN
an MTL company

DATE: 06/05/24
DRN BY: MLM
CKD BY: MM

SHT.#____ OF ____

DWG# 64011-43015 A