



# NON 90° COPING MITERS

## OUTSIDE MITER - OBTUSE

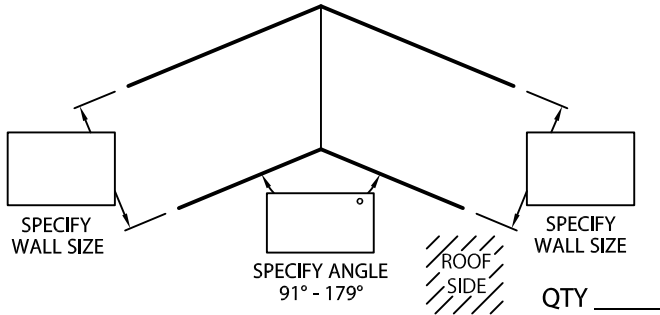


## OUTSIDE MITER - ACUTE

INTERNAL USE

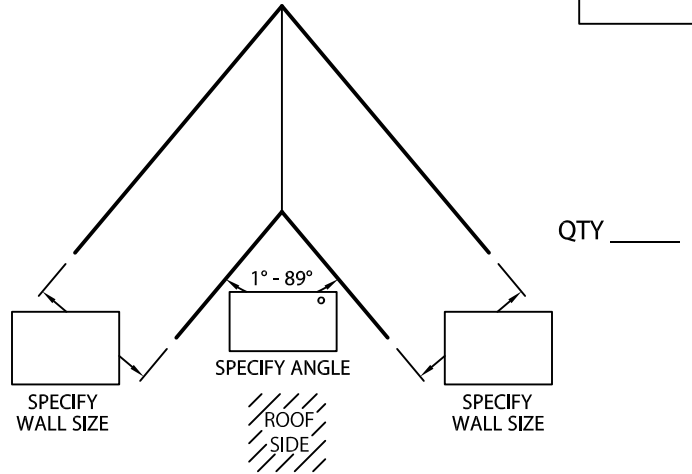


## INSIDE MITER - OBTUSE

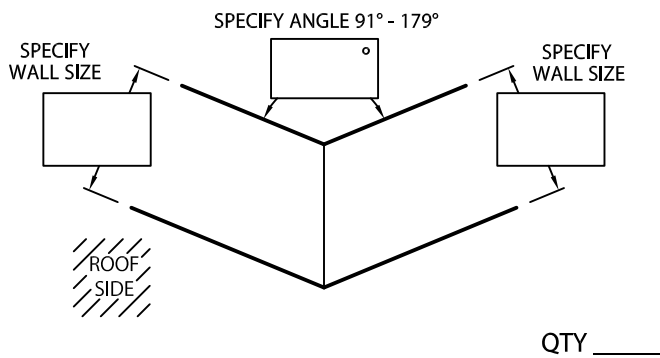

## INSIDE MITER - ACUTE

INTERNAL USE

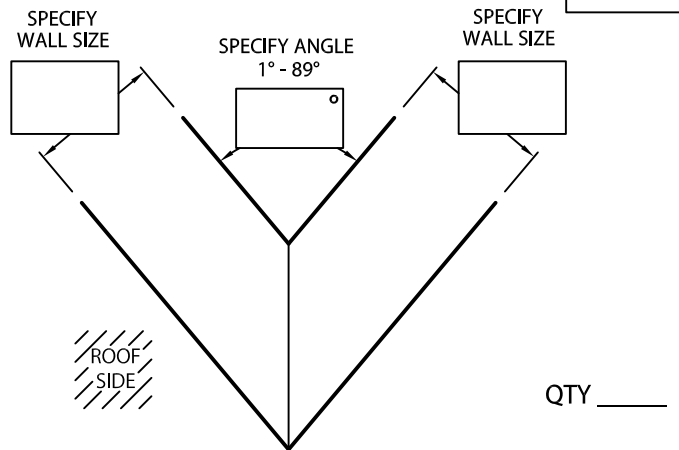

### NOTES:

--- FOR CUSTOM LEG LENGTHS MODIFY DRAWING ABOVE.

① WELDED ACCESSORIES REQUIRE A MINIMUM MATERIAL THICKNESS OF .050".

### MATERIAL:

\_\_\_ 24 GA. GALVANIZED STEEL

\_\_\_ 22 GA. GALVANIZED STEEL

\_\_\_ .040" ALUMINUM

\_\_\_ .050" ALUMINUM

\_\_\_ .063" ALUMINUM

\_\_\_ OTHER \_\_\_\_\_

SPECIFY ACCESSORY TYPE:

WELDED ①

QUICKLOCK

COLOR: \_\_\_\_\_

FINISH: \_\_\_\_\_

AUTHORIZED SIGNATURE:

APPROVED BY: \_\_\_\_\_

DATE: \_\_\_\_\_

PROJECT:

ARCHITECT:

ROOFING CONTRACTOR:

REPRESENTATIVE/DISTRIBUTOR:

**Hickman Edge Systems**

**4 Commerce Way**

**Arden, NC 28704**

**Phone: 828-676-1700**

**www.hickmanedgesystems.com**

DATE: 06/09/22

SHT.# \_\_\_\_ OF \_\_\_\_

DRN BY: MLM

CKD BY: MM

DWG# 64011-38614

**A**

**HICKMAN**  
an MTL company

# NON 90° COPING MITERS

RIGHT ANGLES ARE 90°  
ACUTE ANGLES RANGE FROM 1° - 89°  
OBTUSE ANGLES RANGE FROM 91° - 179°

