




# SECUREEDGE 2000 EXTENDED CANTED WD FASCIA GALVANIZED WATERDAM VERSION

## NOTES

- Fascia cover provided with splice plates
- For non-90 miters, see separate print approval
- Product should be installed per provided installation instructions
- ANSI/SPRI/FM 4435/ES-1 Test Pressure up to 139 psf

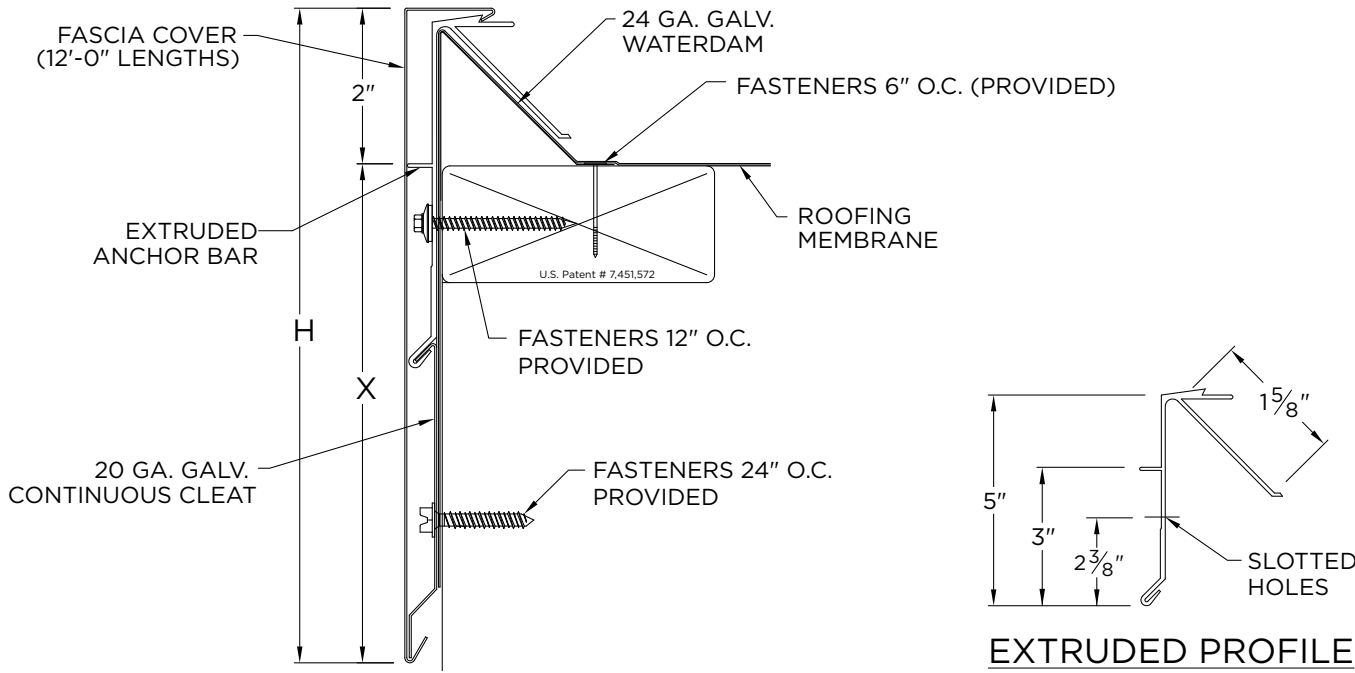

## APPROVALS



**ANSI/SPRI/FM 4435/ES-1**  
Test Pressures listed in notes

## PROJECT INFO

Project Name: \_\_\_\_\_

Architect: \_\_\_\_\_

Roofing Contractor: \_\_\_\_\_

### Project Type:

By selecting this box you have verified and confirmed that dimensions, sizes, and quantities are correct. All products will be installed in strict accordance with printed instructions.

Date: \_\_\_\_\_

CKD BY: **MM**

**Carlisle SynTec Systems**  
Customer Service  
866-458-3537  
(Metal-Era)

SHT# 1 of 1

DATE: **11/29/21**

DRN BY: **JJC**

DWG #: 15010-1642

REV: **J**

## DIMENSIONS

PRODUCT ID. NO.	H DIM	X DIM	NAILER COVERAGE
<input type="checkbox"/> AEFC-902	9"	7"	4 NAILERS
<input type="checkbox"/> AEFC-1052	10 1/2"	8 1/2"	5 NAILERS
<input type="checkbox"/> AEFC-1202	12"	10"	6 NAILERS
<input type="checkbox"/> AEFC-1352	13 1/2"	11 1/2"	7 NAILERS

## MATERIAL

- 22 Ga. Galv. Steel  
 .050" Aluminum  
 .063" Aluminum  
 OTHER: \_\_\_\_\_

Color: \_\_\_\_\_

Finish: \_\_\_\_\_

**Substrate:**  Wood  
 Masonry  
 Metal  
If substrate is not given, wood fasteners will be provided.

## QUANTITIES

\_\_\_\_\_ Lineal Feet (12'-0" Lengths)

\_\_\_\_\_ Outside Miter (90°)

\_\_\_\_\_ Inside Miter (90°)

\_\_\_\_\_ Right Endcaps

\_\_\_\_\_ Left Endcaps

\_\_\_\_\_ Right Endwall Flashing

\_\_\_\_\_ Left Endwall Flashing

\_\_\_\_\_ Overflow Scupper

Style A

Style B

\_\_\_\_\_ Spillout Scupper

Style A

Style B

\_\_\_\_\_ Downspout Scupper

Style A  Style B

Size \_\_\_\_\_x\_\_\_\_\_

Style A=Tapered 1.5" Drop | Style B=Flat