




SECUREEDGE CF COPING

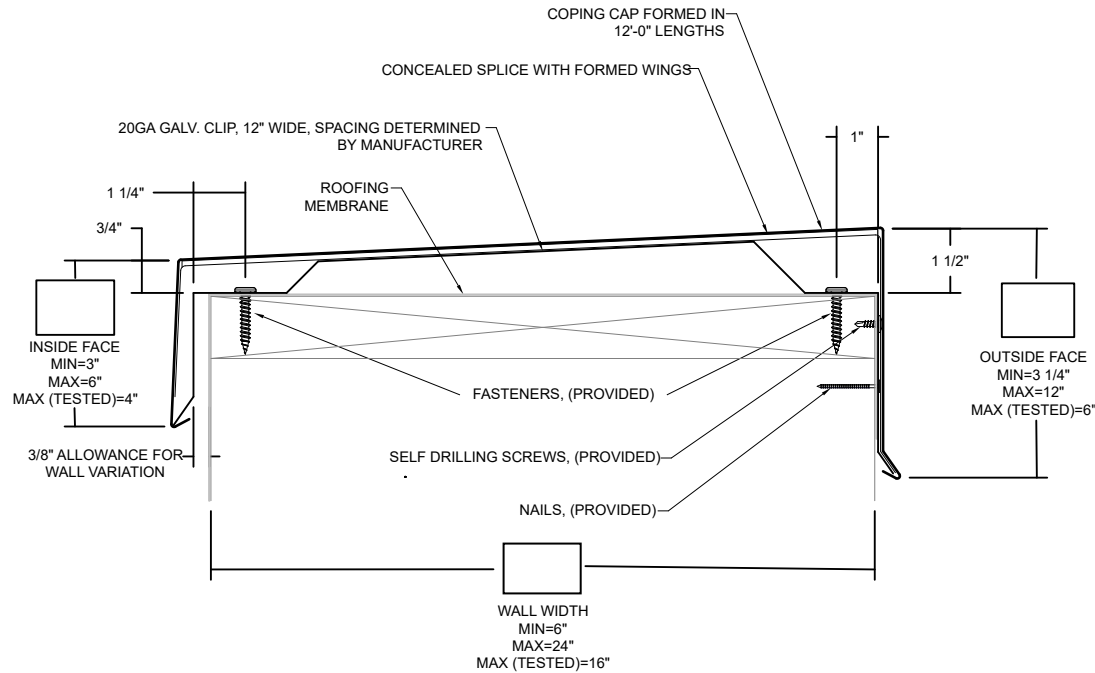

* NOTES

- Oil canning can occur on larger face heights; recommend 22 ga., .050" or .063" for face height above 8"
- Unless otherwise noted, fabrication of miters and accessories are furnished standard utilizing a non-penetrating quicklock joint, then factory sealed watertight.
- Welded accessories require a minimum material thickness of .050"
- For non-90 miters, see separate print approval
- Product should be installed per provided installation instructions
- ANSI/SPRI/FM 4435/ES-1 test pressures up to 69 psf (Horizontal) and 121 psf (Vertical) for 24 ga. galv. steel cap on 16" wall
- Contact us for masonry applications

PROJECT INFO

Project Name: _____

Architect: _____

Roofing Contractor: _____

Project Type:

By selecting this box you have verified and confirmed that dimensions, sizes, and quantities are correct. All products will be installed in strict accordance with printed instructions.

Date: _____

Customer Service
866-458-3537
(Metal-Era)

SHT #: _____ of _____

DATE: **09/17/24**

DRN BY: **PL**

CKD BY: **KP**

DWG #: 15011-37072

REV: **B**

APPROVALS*

ANSI/SPRI/FM 4435/ES-1
Test Pressures listed in notes

MATERIAL*

- 24 Ga. Galv. Steel
 - 22 Ga. Galv. Steel
 - .040" Aluminum
 - .050" Aluminum
 - .063" Aluminum
 - OTHER: _____
- Color: _____
- Finish: _____
- Substrate:
- Wood
 - Masonry
 - Metal
- if substrate is not given, wood fasteners will be provided.

QUANTITIES


Accessory Type* : Quicklock (Default) Welded (Surcharge)

- _____ Straight Lineal Feet (12'-0" Lengths)
- _____ Total Miters (90°) (Inside: ___ | Outside: ___)
- _____ Total Endcaps (Left: ___ | Right: ___)
- _____ Total Endwall Flashing (Left: ___ | Right: ___)
- _____ Transition Miters
- _____ T-Miters
- _____ Z-Miters
- _____ Radius Lineal Feet (Welded) (4'- 0" Lengths)
- _____ Radius to Straight Miters (Welded)
- _____ Radius End Caps
- _____ Vault Lineal Feet (Welded) (4'- 0" Lengths)
- _____ Vault to Straight Miters (Welded)
- _____ Vault End Caps
- _____ Ridge Miters
- _____ Valley Miters

SECUREDGE CF COPING
STANDARD ACCESSORIES

NOTES

For special miter and accessory requirements, contact manufacturer for assistance.

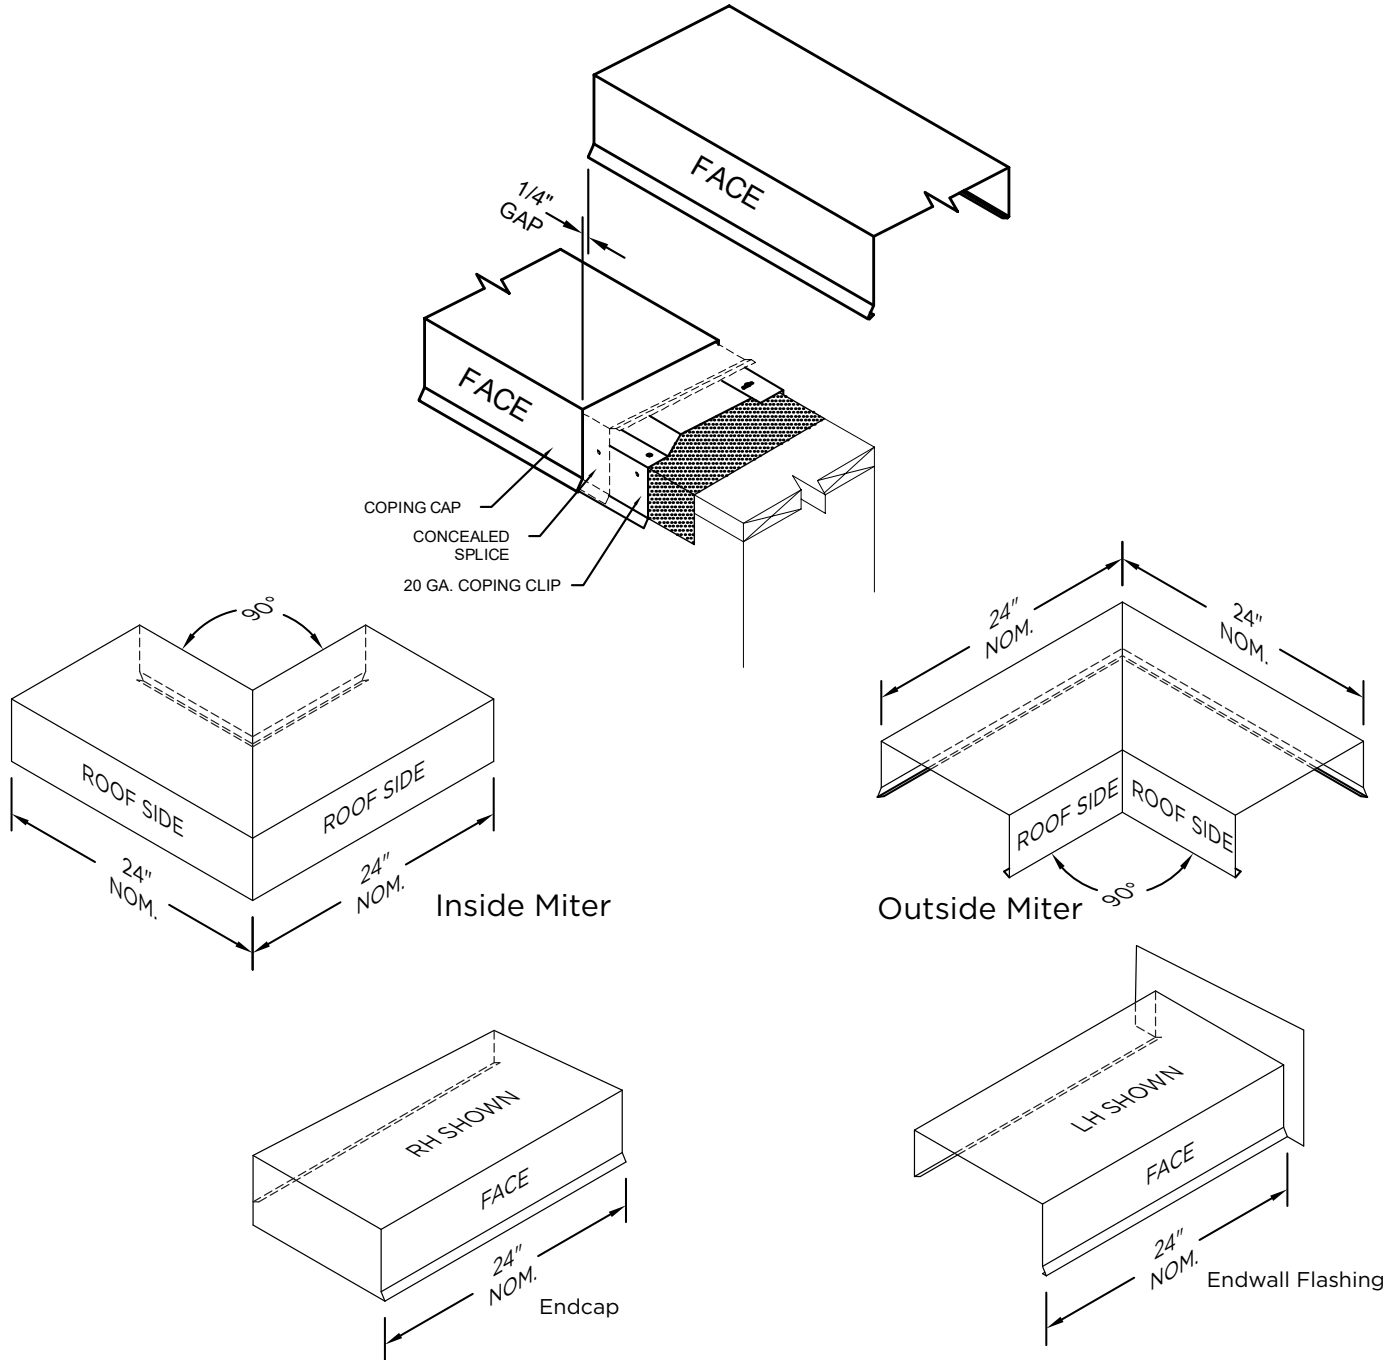

SHT #:	_____ of _____
DATE:	09/17/24
DRN BY:	PL
CKD BY:	KP
DWG #:	15011-37072
REV:	B

Customer Service
866-458-3537
(Metal-Era)